

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2003 (17.04.2003)

PCT

(10) International Publication Number
WO 03/031855 A1

(51) International Patent Classification⁷: **F16K 31/42**

(21) International Application Number: **PCT/GB02/04566**

(22) International Filing Date: **9 October 2002 (09.10.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0124289.0 10 October 2001 (10.10.2001) GB
0211080.7 15 May 2002 (15.05.2002) GB

(71) Applicant (for all designated States except US): **HALDEX
BRAKE PRODUCTS LTD** [GB/GB]; Moons Moat Drive,
North Moons Moat, Redditch, Worcestershire B98 9HA
(GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHAW, Edward,**

Gilbert [GB/GB]; 14 Midsummer Meadow, Inkberrow,
Worcestershire WR7 4HD (GB). **POTTER, Laurence,
John** [GB/GB]; 15 Southlands Road, Moseley, Birming-
ham B13 9RL (GB).


(74) Agent: **FORRESTER KETLEY & CO**; Chamberlain
House, Paradise Place, Birmingham B3 3HP (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: **PILOT OPERATED VALVE**

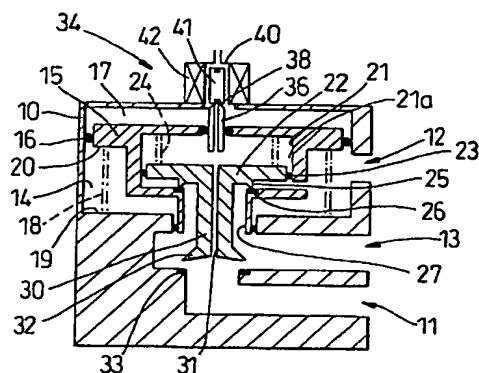

(57) Abstract: A valve assembly having a fluid switch (38, 40, 41, 42) and a main valve (15, 22, 26, 33) for controlling fluid pressure in a working volume (13) in three control states wherein the main valve has three ports for fluid (11, 12, 13), flow of fluid through a first port (33) and a second port (26) being controlled by the fluid switch being provided with an electrical signal in a first state or a second state respectively, and flow of fluid through the third port (31) being controlled by alternating said signal, preferably rapidly, between said first and second states.

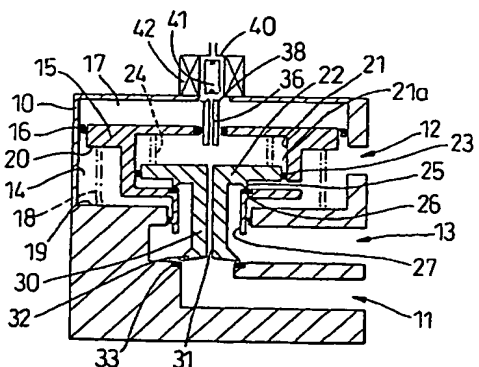

WO 03/031855 A1